

The most versatile Saws you've ever Seen!



Model 5300A



Model 5302

Whether you need a reciprocating air saw that offers high speed for fast cutting action, or one with lower speed for composite and plastic materials, Sioux Tools has the right tool for the job.


Don't let the compact design of the 5300A high speed saw fool you. This powerful tool puts out 10,000 strokes per minute, making fast work of any application. The 5302 features a lower 5,000 strokes per minute, for cutting materials that won't hold up under the heat produced in high speed cuts.

Both models feature an ergonomically designed comfort grip that protects the operator from cold and vibration, making them more comfortable to use. In addition, a built-in air regulator allows fine speed adjustment for cutting different materials, and an adjustable blade guard controls the depth of cut. Model 5302 also features a 24" hose assembly with flexible over-hose to direct exhaust air and noise away from the operator.

RECIPROCATING SAWS



FORCE

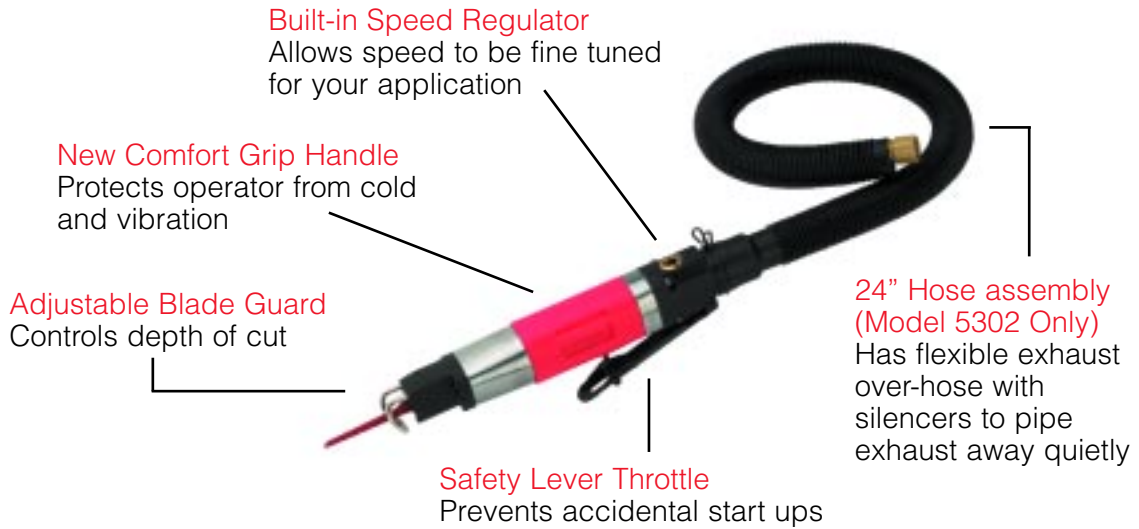

Reciprocating Air Saws

Model Number	Stroke Length		Strokes per Minute	Weight		Length		Air Consumption		Sound Level dB(A)
	in.	mm		lb	kg	in.	mm	cfm	l/s	
High Speed Air Saw										
5300A	3/8	10	10,000	1.8	0.8	9.2	235	1.0	0.5	82
Low Speed Air Saw										
5302	3/8	10	5000	2.1	1.0	9.1	230	1.0	0.5	80

General:

Air Inlet Size: 1/4" NPT
 Hose Size: 5/16" (8mm)
 Tool performance rated at 90 psig (6.2 bar) air pressure
 Capacity: 18 Gauge mild steel

Standard Equipment:

Parts list, Safety and Instruction manual
 Comfort Grip
 Adjustable Blade Guard
 24" hose assembly with flexible exhaust over-hose (5302 only)

Bi-Metal Replacement Saw Blades (sold in sets of 5)

Model Number	TPI	Length
		in.
Bi-Metal Saw Blades		
1823	18	4.0
1824	24	4.0
1825	32	4.0



1825 Bi-Metal Blade 32TPI
 4" long (set of 5)


SIoux TOOLS INC.



250 Snap-on Drive
 P.O. Box 1596
 Murphy, North Carolina USA 28906
 PH: 828.835.9765
 TOLL FREE: 866.259.7291
 FAX: 800.722.7236

Snap-on Industrial Germany
 Division of Snap-on Holding GmbH
 i.G.
 Auf dem Hüls 5
 40822 Mettmann
 Germany
 Telefon: +49 2104-9509-0
 Fax: +49 2104-9509-99
 e-mail: snapon.industrial@snapon.com

Distributed By:

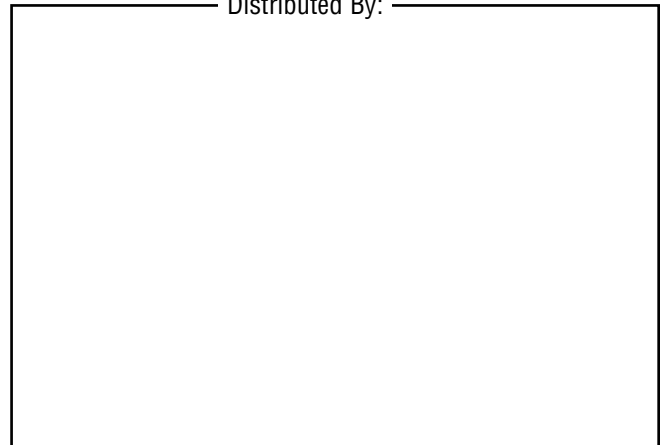

FORM# ZML0052
 PRINTED IN USA
 08/02 5M

www.siouxtools.com